

SECTION THRU A


SYMBOL	MATERIAL	MIXER RATING
C	CARBON STEEL	260 PSIG/200°F
S	STAINLESS STEEL	240 PSIG/200°F
F	FIBERGLASS	150 PSIG/165°F
P	PVC	150 PSIG/100°F
CP	CPVC	200 PSIG/100°F

HOUSING: CARBON STEEL – A53 GR B SCHEDULE 40
 STAINLESS STEEL – TYPE 316 SCHEDULE 40
 P.V.C. – SCHEDULE 80
 F.R.P. – 150 PSI RATED FILAMENT WOUND

FLANGES: ANSI B16.5 – 150 LB DRILLING
 CARBON STEEL & STAINLESS STEEL – RAISED FACED
 P.V.C. – RAISED FACE VANSTONE
 F.R.P. – FLAT FACED

TABULATION BLOCK				
LINE SIZE NPS	L1 ±1/8"	L2	L3	L4
3	16	4	7	4 1/8
4	21	5	7 3/4	4 5/8
6	32	6	8 3/4	5 5/8
8	40	8	9 3/4	6 5/8
10	50	10	10 3/4	7 5/8
ALL DIMENSIONS ARE IN INCHES				

TYPICAL MODEL NUMBER:

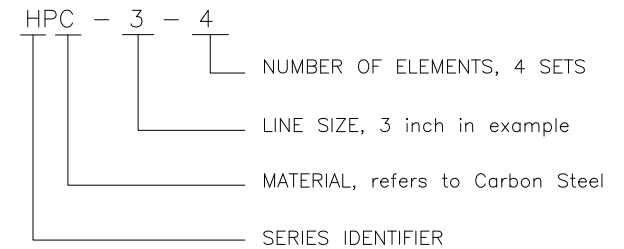

KOMAX® SYSTEMS, INC.
 P.O. BOX 1323 WILMINGTON, CA 90748-1323 213-830-4320 FAX: 213-830-9826

OUTLINE & MOUNTING CONFIGUTATION

KOMAX HIGH PASS SLUDGE MIXER

SCALE: 1/4" = 1"	APPROVED:	DRAWN BY: DP
DATE: 09-09-92		REV. DATE: 10-27-95
CUSTOMER:	QUOTE NO.:	CODE#
	JOB NO.:	DRAWING NUMBER:
		004-58 18658