


HOUSING: TYPE 316 STAINLESS STEEL
SANITARY TUBING

END CONNECTIONS: T316 S.S. TRI-CLAMP TYPE
SANITARY FERRULES.

MIXING ELEMENTS: THREE (3) T316 STAINLESS STEEL
WELDED TOGETHER AS AN ASSEMBLY
REMOVABLE ON THE UPSTREAM END
FOR CLEANING OR INSPECTION.

INSTALLATION: HORIZONTAL OR VERTICAL
DOWN-FLOW.

TYPICAL MODEL NUMBER:

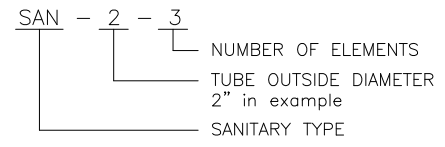

TABULATION BLOCK				
MODEL NUMBER	TUBE SIZE	L ±1/8"	TUBE WALL THICKNESS	ELEMENT THICKNESS
SAN-1-3	1	5	0.065	.060 (16 GA)
SAN-1 1/2-3	1 1/2	7	0.065	.060 (16 GA)
SAN-2-3	2	9	0.065	.060 (16 GA)
SAN-2 1/2-3	2 1/2	11	0.065	.120 (11 GA)
SAN-3-3	3	14	0.065	.120 (11 GA)
SAN-4-3	4	18	0.083	.120 (11 GA)
SAN-6-3	6	27	0.083	.187 (7 GA)
ALL DIMENSIONS ARE IN INCHES				

NOTE:
ALL CONSTRUCTION TO BE T316
STAINLESS STEEL SANITARY WITH
ALL SURFACES 16 ?in AARH FINISH.

KOMAX® SYSTEMS, INC.
P.O. BOX 1323 WILMINGTON, CA 90748-1323 310-830-4320 FAX: 310-830-9826

OUTLINE & MOUNTING CONFIGURATION

STANDARD 3 ELEMENT "SAN" SANITARY MIXER

SCALE: NONE	APPROVED:	DRAWN BY: DP
DATE: 06-06-95		REV. DATE:
THIS DRAWING SUPERSEDES DRAWING NO. 5750C DRAWN 07-15-86	QUOTE NO.: JOB NO.:	CODE# DRAWING NUMBER: 010-3 20698